

Medium Pressure

HOK 20/100 1CT

Medium Pressure Mercury lamps are available in a wide range with an arc length between 10 and 140 centimeter. The lamps can be fitted with various types of end fitting from our catalogue, or equipped with customer special fittings, cables or pins. The lamps are made from selected types of quartz glass, with transmission characteristics tailored to the application. Medium Pressure Mercury lamps contain sophisticated quantities of mercury bromides, providing a self-cleaning halogen cycle, to control the depreciation of UV radiation over lamp life.

Product data

• General Characteristics

Cap-Base C14X Cap-Base Information Cable 250mm Execution p10 **Operating Position** Industrial UV Main Application Run Time 0.016 (max) hr

• Electrical Characteristics

Lamp Wattage 2100 W Lamp Wattage Tech-2100 W nical Lamp Voltage 230 (min), 245 (nom), 260 (max) V Lamp Current 9.6 A Ignition Time 10 (max) s Re-ignition Time 10 (max) min 100 W/cm Consumed Watt per cm

Product Dimensions

Overall Length C Diameter D

254 (max) mm 24 (max) mm

Arc Length O 200 mm

 Luminaire Design Requirements **Pinch Temperature Bulb Temperature**

300 (max) C 600 (min), 900 (max) C


• Product Data

Order code 928188205102 928188205102 Full product code HOK 20/100 1CT Full product name HOK 20/100 1CT/6 Order product name Pieces per pack Packing configuration 6 Packs per outerbox 6 8711500188700 Bar code on pack -EAN1 Bar code on 8711500188717 outerbox - EAN3 928188205102 Logistic code(s) -12NC Net weight per piece 0.075 kg



Dimensional drawing






HOK C14X

F	roduct	C (Max)	D (Max)	O (Norm)
ŀ	HOK 20/100	256	21.92	200

Photometric data

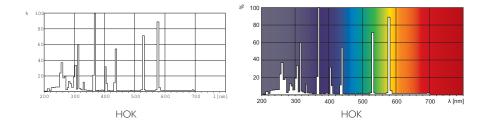



 $\ensuremath{\mathbb{C}}$ 2011 Koninklijke Philips Electronics N.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting