

CDM

CDM-SA/R 150W/942 UNP

Compact reflector discharge lamps with quartz outer bulb



Product data

• General Characteristics

Cap-Base	Ceramic Cap-Cable
Cap-Base Information	Cable 250mm
Burning Position	any
Main Application	Fiber Optics
Life to 50% failures	6000 hr

• Electrical Characteristics

Rated Lamp Wattage	150 W
Technical Lamp	152 W
Power	
Lamp Current	1.8 A
Ignition Supply Voltage	198 (min) V
Dimmable	no

• Light Technical Characteristics

Colour Code	942
Colour Rendering Index	96 Ra8
Colour Designation	Cool White
Colour Temperature	4200 K
Colour Temperature Technical	4000 K
Chromaticity Coordinate X	361 -
Chromaticity Coordinate Y	351 -
Lamp Luminous Flux EM	2300 (min), 2750 (nom) Lm

Lamp Luminous Efficacy EM	19 Lm/W
---------------------------	---------

• Product Dimensions

Overall Length C	106 (max) mm
Diameter D	95.3 (max) mm
Cable Length X	280 mm


• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	650 (max) C

• Product Data

Order code	201508 00
Full product code	871150020150800
Full product name	CDM-SA/R 150W/942 UNP
Order product name	CDM-SA/R 150W/942 UNP/1
Pieces per pack	1
Packing configuration	1
Packs per outerbox	1
Bar code on pack - EAN1	8711500201508
Bar code on outerbox - EAN3	8711500201508
Logistic code(s) - 12NC	928086805303
Net weight per piece	0.192 kg



Dimensional drawing



Product	C (Max)	D (Max)	X (Norm)
CDM-SA/R 150W/942	106	95.3	280



Photometric data

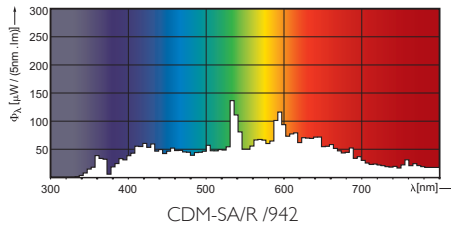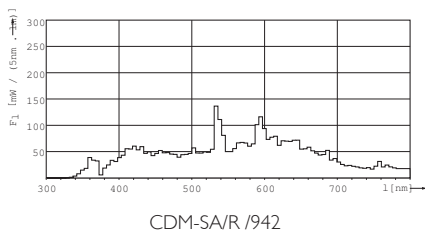

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, May 17
data subject to change