


MPXL

DUV35 P32d 1CT

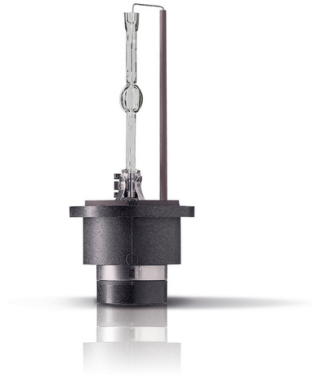

These microdischarge lamps are hot restrike, extremely robust, offer a long service life and come with either 35 or 50 watt power ratings. The DL and RP types can be operated in fast run-up mode and emit very little UV light due to the UV blocking outer bulb. In the RP version the burner is mounted for optimal light performance in a converging 50 mm reflector. The DUV versions are unique and emit in the UV spectrum.

Product data

• General Characteristics

Philips Code	DUV35
Cap-Base	P32d
Operating Position	p
Main Application	Industrial UV

• Electrical Characteristics


Voltage	85 V
---------	------

• Product Data

Order code	928550229404
------------	--------------

Full product code	928550229404
Full product name	DUV35 P32d 1CT
Order product name	DUV35 P32d 1CT/24
Pieces per pack	1
Packing configuration	24
Packs per outerbox	24
Bar code on pack - EAN1	8711500404886
Bar code on outerbox - EAN3	8711500404893
Logistic code(s) - 12NC	928550229404
Net weight per piece	14.000 gr

Dimensional drawing




DUV35

Product	C (Max)	D (Max)	D1 (Max)	L (Max)	O (Max)
DUV35 P32d	-	-	-	-	-

PHILIPS

sense and simplicity

Dimensional drawing



© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, August 26
data subject to change