



# Flexo Print

TL 60W/10-R 1SL

Tubular low-pressure mercury vapour discharge lamps

## Product data

### • General Characteristics

Cap-Base	G13 [G13]
Bulb	T38
Main Application	Reprography
Useful Life	1000 hr

### • Electrical Characteristics

Rated Lamp Wattage	60 W
Technical Lamp Power	62 W
Lamp Voltage	102 V
Lamp Current	0.7 A

### • Environmental Characteristics

Mercury (Hg) Content	13.0 mg
----------------------	---------

### • Light Technical Characteristics

Colour Code	10-R
Colour Designation	Ultra Violet A
Chromaticity Coordinate X	222 -
Chromaticity Coordinate Y	210 -
Depreciation 500 hours	10 %
Depreciation 1000 hours	15 %
Depreciation 2000 hours	30 %

### • UV-related Characteristics

UV-A Radiation 100hr (IEC)	15.8 W
UV-B/UV-A (IEC)	0.1 %

### • Product Dimensions

Base Face to Base Face A	1199.4 (max) mm
Insertion Length B	1204.1 (min), 1206.5 (max) mm
Overall Length C	1213.6 (max) mm
Diameter D	40.5 (max) mm


### • Product Data

Order code	615725 40
Full product code	871150061572540
Full product name	TL 60W/10-R SLV
Order product name	TL 60W/10-R SLV/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500615725
Bar code on outerbox - EAN3	8711500615732
Logistic code(s) - 12NC	928008401003
Net weight per piece	260.200 gr

# PHILIPS


sense and simplicity

Dimensional drawing




TL G13

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL 60W/10-R	1199.4	1204.1	1206.5	1213.6	40.5



Photometric data

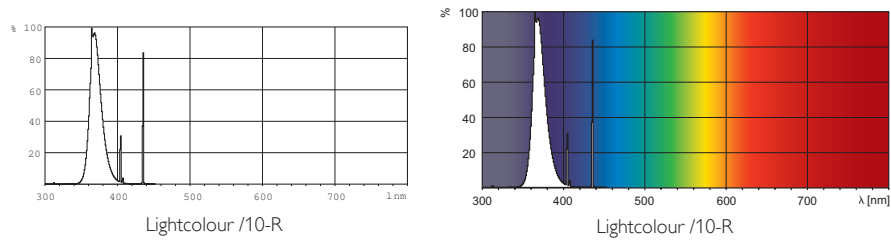

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, May 18  
data subject to change