

TUV T8

TUV 55W HO 1SL

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

Product data

General Characteristics

System Description	High Output
Cap-Base	G13 [G13]
Bulb	T26
Main Application	Disinfection
Useful Life	9000 hr

• Electrical Characteristics

Rated Lamp Wattage Technical Lamp	55 W 54 W
Power	
Lamp Voltage	86 V
Lamp Current	0.77 A

• Environmental Characteristics

Mercury (Hg)	2.0 mg
Content	

Light Technical Characteristics

-

Colour Designation

• UV-related Characteristics

UV-C Radiation 17.5 W

• Product Dimensions

Base Face to Base Face A Insertion Length B Overall Length C Diameter D 894.6 (max) mm


899.3 (min), 901.7 (max) mm 908.8 (max) mm 28 (max) mm

• Product Data

Order code Full product code Full product name Order product name Pieces per pack Packing configuration Packs per outerbox Bar code on pack -EAN1 Bar code on outerbox - EAN3 Logistic code(s) -12NC Net weight per piece 618665 10 871150061866510 TUV 55W HO 1SL TUV 55W HO 1SL/6 1 6 8711500618665 8711500618672 928049504003 140.000 gr




Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TUV TL-D 55W HO	894.6	899.3	901.7	908.8	28



Photometric data

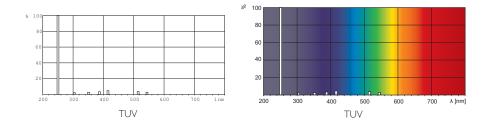



 $\ensuremath{\mathbb{C}}$ 2011 Koninklijke Philips Electronics N.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting