

Actinic BL TL/TL-D/T5



Actinic BL TL MINI 15W/10

With an optimized performance to attract most insects, Actinic BL TL, BL TLD and BL T5 lamps are the ideal choice for electronic insect killer systems. They are also suitable for photopolymerization and reprographic processes. A wide choice of wattages and a special 200-degree internal reflector version are available. In addition, Philips provides single-ended compact and T5 Actinic lamp versions as well as a circular Actinic lamp. For extra safety, there is a special shatter-proof "Secura" option which ensures that all the lamp's glass and components are retained in a special outer sleeve in the case of accidental breakage. Hence, product designers have a high degree of flexibility in choosing the best fitting solution for their needs – including compact designs. What's more, as a 100% lead-free and low-mercury product these lamps also provide a responsible environmental choice.

Product data

• General Characteristics

Cap-Base	G5
Bulb	T16
Useful Life	1000 (max) hr

• Electrical Characteristics

Lamp Wattage	15 W
Lamp Wattage Technical	15 W
Lamp Voltage	43 V
Lamp Current	0.40 A

• Light Technical Characteristics

Color Code	10
Color Designation (text)	Actinic
Depreciation 2000 hours	45 %

• UV-related Characteristics

UV-B/UV-A (IEC)	0.2 %
UV-A Power (IEC)	3.0 W

• Product Dimensions

Base Face to Base Face A	288.3 (max) mm
--------------------------	----------------

Insertion Length B	293.0 (min), 295.4 (max) mm
Overall Length C	302.5 (max) mm
Diameter D	16 (max) mm


• Product Data

Order code	928001201030
Full product code	928001201030
Full product name	Actinic BL TL MINI 15W/10
Order product name	Actinic BL TL MINI 15W/10 / 10X25CC
Pieces per pack	1
Packing configuration	10X25CC
Packs per outerbox	250
Bar code on pack - EAN1	8711500951489
Bar code on intermediate packing - EAN2	8711500951496
Bar code on outerbox - EAN3	8711500951502
Logistic code(s) - 12NC	928001201030
Net weight per piece	25.300 gr

PHILIPS


sense and simplicity

Dimensional drawing





TL G5

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL 15W/10	288.3	293.0	295.4	302.5	16



Photometric data

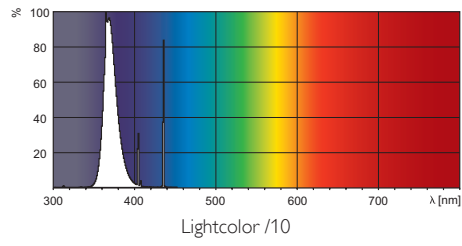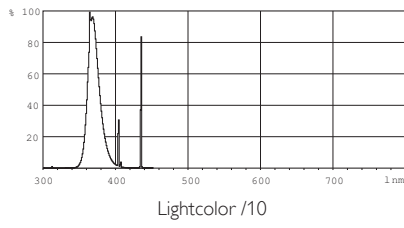

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, August 26
data subject to change