



MASTER PL-S 4 Pin

MASTER PL-S 11W/827/4P 1CT

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	2G7
Cap-Base Information	4P
Life to 50% failures EM	10000 hr
Life to 50% fail Preheat EL,3h	13000 hr
Life to 50% fail Nonpreh EL,3h	7000 hr
Life to 10% fail Nonpreh EL,3h	4500 hr
Life to 10% fail Preheat EL,3h	8000 hr
Life to 10% failures EM	6500 hr
LSF HF Preheat 16000h Rated,3h	30 %
LSF HF Preheat 12000h Rated,3h	66 %
LSF HF Preheat 8000h Rated,3h	92 %
LSF HF Preheat 6000h Rated,3h	97 %
LSF HF Preheat 4000h Rated,3h	98 %
LSF HF Preheat 2000h Rated,3h	99 %

• Light Technical Characteristics

Color Code	827 [CCT of 2700K]
Color Rendering Index	82 Ra8
Color Designation (text)	Incandescent White
Color Temperature	2700 K

Chromaticity Coordinate X	455 -
Chromaticity Coordinate Y	417 -
Lum Efficacy Rated EM 25°C	80 Lm/W
LLMF HF 12000h Rated	86 %
LLMF HF 8000h Rated	88 %
LLMF HF 6000h Rated	90 %
LLMF HF 4000h Rated	92 %
LLMF HF 2000h Rated	95 %
Luminous Flux EM 25°C, Rated	880 Lm
Luminous Flux EL 25°C, Rated	880 Lm
Luminous Flux EL 25°C, Nominal	900 Lm
Luminous Flux EM 25°C, Nominal	900 Lm
Design Temperature	28 C

• Electrical Characteristics

Lamp Wattage	11 W
Lamp Voltage EL 25°C	89 V
Lamp Current EL 25°C	0.160 A
Dimmable	Yes
Lamp Current EM 25°C	0.160 A



MASTER PL-S 4 Pin

Lamp Wattage EM 25°C, Rated	11.6 W
Lamp Wattage EL 25°C, Rated	11.0 W
Lamp Wattage EL 25°C, Nominal	11 W
Lamp Wattage EM 25°C, Nominal	11 W
Lamp Voltage EM 25°C	89 V

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg

• Product Dimensions

Base Face to Base Face A	196 (max) mm
Insertion Length B	214 (max) mm
Overall Length C	219.9 (max) mm

Diameter D	28 (max) mm
Diameter D1	13 (max) mm

• Product Data



Order code	927936682711
Full product code	927936682711
Full product name	MASTER PL-S 11W/827/4P 1CT
Order product name	MASTER PL-S 11W/827/4P 1CT/ 5X10BOX
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500261144
Bar code on inter- mediate packing - EAN2	8711500261151
Bar code on outerbox - EAN3	8711500261168
Logistic code(s) - 12NC	927936682711
ILCOS code	FSD-11/27/1B-E-2G7
Net weight per piece	41.000 gr

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes


Dimensional drawing



2G7, 4P

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-S 11W/827/4P LM	196	214	219.9	28	13

Photometric data

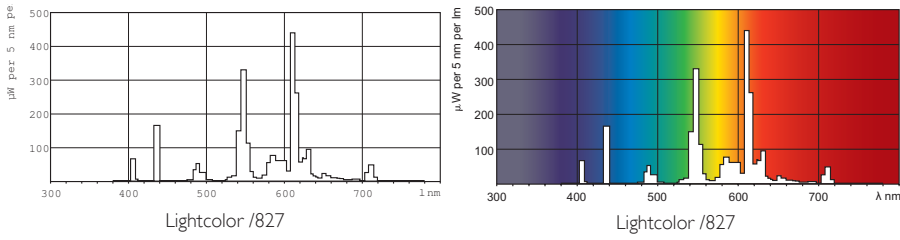

Lamps being part of this product family comply with Commission Regulation (EC) No 245/2009 – Ecodesign requirements, applicable from 13 April 2010.

1.3 Product information requirements on lamps

- a) Nominal and rated lamp wattage;
 - b) Nominal and rated lamp luminous flux;
 - c) Rated lamp efficacy at 100 h in standard conditions (25 °C, for T5 lamps at 35 °C). For fluorescent lamps both at 50 Hz (mains frequency) operation (where applicable) and at High Frequency (> 50 Hz) operation (where applicable) for the same rated luminous flux in all cases, indicating for High Frequency operation the calibration current of the test conditions and/or the rated voltage of the HF generator with the resistance. It shall be stated in a conspicuous manner that the power dissipated by auxiliary equipment such as ballasts is not included in the power consumed by the source;
 - d) Rated lamp Lumen Maintenance Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - e) Rated lamp Survival Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - f) Lamp mercury content as X.X mg;
 - g) Colour Rendering Index (Ra) of the lamp;
 - h) Colour temperature of the lamp;
 - i) Ambient temperature inside the luminaire at which the lamp was designed to maximise its luminous flux. If this temperature is equal to or lower than 0 °C or equal to or higher than 50 °C it shall be stated that the lamp is not suitable for indoor use at standard room temperatures;
 - j) For fluorescent lamps without integrated ballast, the energy efficiency index(es) of ballasts as defined in Table 17 with which the lamp can operate.
- See Table 17-EuP245.pdf for Table 17 – Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps.
For more information see: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:076:0017:0044:EN:PDF>



© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, October 25
data subject to change