



# MASTER PL-C 2 Pin

## MASTER PL-C 10W/830/2P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

### Product data

#### • General Characteristics

|                              |          |
|------------------------------|----------|
| Cap-Base                     | G24d-1   |
| Cap-Base Information         | 2P       |
| Life to 50% failures EM      | 10000 hr |
| Life to 10% failures EM      | 6500 hr  |
| LSF EM 8000h Rated, 3h cycle | 80 %     |
| LSF EM 6000h Rated, 3h cycle | 91 %     |
| LSF EM 4000h Rated, 3h cycle | 95 %     |
| LSF EM 2000h Rated, 3h cycle | 98 %     |

#### • Light Technical Characteristics

|                            |                    |
|----------------------------|--------------------|
| Color Code                 | 830 [CCT of 3000K] |
| Color Rendering Index      | 82 Ra8             |
| Color Designation (text)   | Warm White         |
| Color Temperature          | 3000 K             |
| Chromaticity Coordinate X  | 435 -              |
| Chromaticity Coordinate Y  | 400 -              |
| Lum Efficacy Rated EM 25°C | 60 Lm/W            |
| LLMF EM 8000h Rated        | 81 %               |
| LLMF EM 6000h Rated        | 83 %               |
| LLMF EM 4000h Rated        | 87 %               |

|                                |        |
|--------------------------------|--------|
| LLMF EM 2000h Rated            | 92 %   |
| Luminous Flux EM 25°C, Rated   | 600 Lm |
| Luminous Flux EM 25°C, Nominal | 600 Lm |
| Design Temperature             | 28 C   |

#### • Electrical Characteristics

|                               |         |
|-------------------------------|---------|
| Lamp Wattage                  | 10 W    |
| Dimmable                      | No      |
| Lamp Current EM 25°C          | 0.190 A |
| Lamp Wattage EM 25°C, Rated   | 10.0 W  |
| Lamp Wattage EM 25°C, Nominal | 10 W    |
| Lamp Voltage EM 25°C          | 64 V    |

#### • Environmental Characteristics

|                               |        |
|-------------------------------|--------|
| Energy Efficiency Label (EEL) | B      |
| Mercury (Hg) Content          | 1.4 mg |

#### • Product Dimensions

|                          |                |
|--------------------------|----------------|
| Base Face to Base Face A | 75.7 (max) mm  |
| Insertion Length B       | 94.0 (max) mm  |
| Overall Length C         | 116.4 (max) mm |
| Diameter D               | 27.1 (max) mm  |
| Diameter D1              | 27.1 (max) mm  |



# MASTER PL-C 2 Pin

## • Product Data

Order code 927903608380  
Full product code 927903608380  
Full product name MASTER PL-C 10W/830/2P 1CT  
Order product name MASTER PL-C 10W/830/2P 1CT/  
5X10BOX  
Pieces per pack 1  
Packing configuration 5X10CC  
Packs per outerbox 50  
Bar code on pack -  
EAN1 8711500707246



Bar code on inter-  
mediate packing -  
EAN2 8711500610416  
Bar code on  
outerbox - EAN3 8711500710987  
Logistic code(s) -  
12NC 927903608380  
ILCOS code FSQ-10/30/1B-I-G24d=1  
Net weight per piece 45.000 gr

## Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position

- Dimming is not possible


## Dimensional drawing



## G24d-1/G24d-2/G24d-3, 2P

| Product         | A (Max) | B (Max) | C (Max) | D (Max) | D1 (Max) |
|-----------------|---------|---------|---------|---------|----------|
| PL-C 10W/830/2P | 75.7    | 94.0    | 116.4   | 27.1    | 27.1     |

## Photometric data

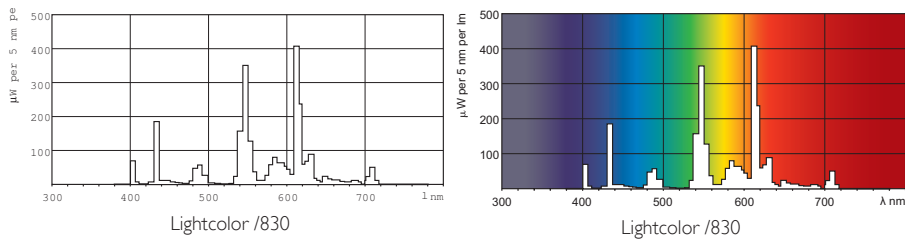

Lamps being part of this product family comply with Commission Regulation (EC) No 245/2009 – Ecodesign requirements, applicable from 13 April 2010.

### 1.3 Product information requirements on lamps

- a) Nominal and rated lamp wattage;
  - b) Nominal and rated lamp luminous flux;
  - c) Rated lamp efficacy at 100 h in standard conditions (25 °C, for T5 lamps at 35 °C). For fluorescent lamps both at 50 Hz (mains frequency) operation (where applicable) and at High Frequency (> 50 Hz) operation (where applicable) for the same rated luminous flux in all cases, indicating for High Frequency operation the calibration current of the test conditions and/or the rated voltage of the HF generator with the resistance. It shall be stated in a conspicuous manner that the power dissipated by auxiliary equipment such as ballasts is not included in the power consumed by the source;
  - d) Rated lamp Lumen Maintenance Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
  - e) Rated lamp Survival Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
  - f) Lamp mercury content as X.X mg;
  - g) Colour Rendering Index (Ra) of the lamp;
  - h) Colour temperature of the lamp;
  - i) Ambient temperature inside the luminaire at which the lamp was designed to maximise its luminous flux. If this temperature is equal to or lower than 0 °C or equal to or higher than 50 °C it shall be stated that the lamp is not suitable for indoor use at standard room temperatures;
  - j) For fluorescent lamps without integrated ballast, the energy efficiency index(es) of ballasts as defined in Table 17 with which the lamp can operate.
- See Table 17-EuP245.pdf for Table 17 – Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps.  
For more information see: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:076:0017:0044:EN:PDF>



© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, November 6  
data subject to change