



TL-D Coloured

TL-D 58W Blue SLV

Tubular low-pressure mercury vapour discharge lamps with a tube wall internally coated with a white fluorescent powder to convert the UV radiation produced by the mercury gas discharge into visible light

Product data

• General Characteristics

Cap-Base	G13
Bulb	T25
Main Application	-
Life to 50% failures	15000 hr
EM	

• Light Technical Characteristics

Color Code	18
Color Designation (text)	Blue
Chromaticity	157 -
Coordinate X	
Chromaticity	70 -
Coordinate Y	
Luminous Flux Lamp EM	1600 Lm
Lumen Maintenance 2000h	95 %
Lumen Maintenance 5000h	90 %
Depreciation 5000 hours	10 %
Depreciation 2000 hours	5 %

• Electrical Characteristics

Lamp Wattage	58 W
Lamp Wattage Technical	58.5 W
Lamp Voltage	111 V
Lamp Current	0.670 A

Dimmable Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	13.0 mg

• Product Dimensions

Base Face to Base Face A	1500 (max) mm
Insertion Length B	1504.7 (min), 1507.1 (max) mm
Overall Length C	1514.2 (max) mm
Diameter D	28 (max) mm


• Product Data

Order code	954510 40
Full product code	871150095451040
Full product name	TL-D 58W Blue SLV
Order product name	TL-D 58W Blue SLV/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500954510
Bar code on outerbox - EAN3	8711500954527
Logistic code(s) - 12NC	928049001805
Net weight per piece	172.600 gr


PHILIPS

sense and simplicity


Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 58W/18	1500	1504.7	1507.1	1514.2	28



Photometric data

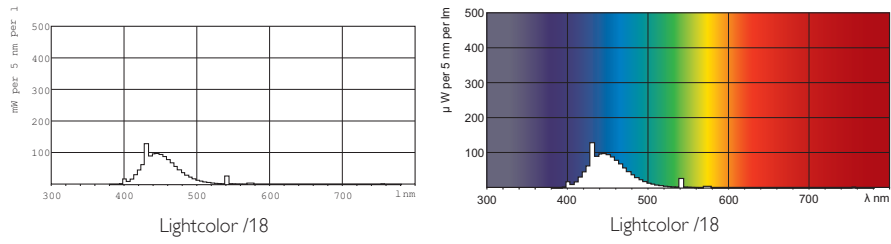

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, October 6
data subject to change