



MASTERCcolour CDM-T Elite

MASTERCcolour CDM-T Elite 50W/930 G12 1CT

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Characteristics

Cap-Base	G12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 50% failures EL	15000 hr
Life to 5% failures EL	7500 hr
Life to 20% failures EL	11000 hr
Life to 10% failures EL	9000 hr

• Light Technical Characteristics

Color Code	930 [CCT of 3000K]
Color Rendering Index	87 (min), 90 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Color Temperature Technical	2970 K
Chromaticity Coordinate X	0.435 -
Chromaticity Coordinate Y	0.396 -
Luminous Flux Lamp EL	5400 Lm
Luminous Efficacy Lamp EL	106 Lm/W
Lumen Maintenance EL 2000h	94 %
Lumen Maintenance EL 5000h	88 %
Lumen Maintenance EL 10000h	83 %

Lumen Maintenance EL 12000h	82 %
Design Mean Lumens EL	4750 Lm

• Electrical Characteristics

System Power EL	56 W
Lamp Wattage	50 W
Lamp Wattage EL	50 W
Lamp Voltage	90 V
Lamp Current EL	0.57 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Mercury (Hg) Content	6.4 mg
----------------------	--------

• UV-related Characteristics

Damage Factor D/fc	0.2 -
--------------------	-------

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Pinch Temperature	350 (max) C
Bulb Temperature	500 (max) C

• Product Dimensions

Reference Length A	90 (max) mm
--------------------	-------------



asimpleswitch.com

PHILIPS

sense and simplicity

MASTERCcolour CDM-T Elite

Overall Length C	103 (max) mm
Diameter D	20 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm
Arc Length O	6 mm
Light Center Length L [inch]	0.27 (min), 0.28 (nom), 0.295 (max) in
Overall Length C [inch]	4 (max) in
Diameter D [inch]	0.79 (max) in

• Product Data


Order code	930603 00
Full product code	872790093060300

Full product name	MASTERCcolour CDM-T Elite 50W/930 G12 1CT
Order product name	MASTERC CDM-T Elite 50W/930 G12 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900930603
Bar code on outerbox - EAN3	8727900930610
Logistic code(s) - 12NC	928191705131
ILCOS code	MT-50/30/1A-H-G12
Net weight per piece	0.030 kg

Warnings and Safety


- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

Dimensional drawing




CDM-T Elite 35W - 70W G12

Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-T ACCENT 50W/930 G12	103	20	55	56	57	6



Photometric data

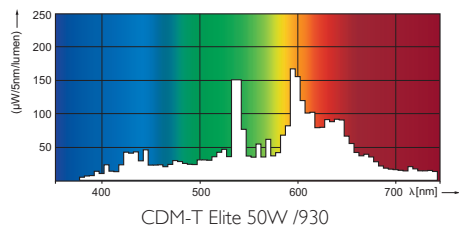

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, November 16
data subject to change