



MASTER CityWhite CDO-TT

MASTER CityWhite CDO-TT Plus 150W/942 E40

Ceramic metal halide lamp with clear tubular outer bulb shape, used in outdoor offering pleasant white light

Product data

• General Information

Cap-Base	E40 [E40]
Bulb Shape	T46 [T 46mm]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	6000 h
Life To 10% Failures (Nom)	8000 h
Life To 20% Failures (Nom)	12000 h
Life To 50% Failures (Nom)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	95 %
LSF 8000 h Rated	91 %
LSF 12000 h Rated	80 %
LSF 16000 h Rated	65 %
LSF 20000 h Rated	50 %

• Light Technical

Color Code	942 [CCT of 4200K]
Luminous Flux (Rated) (Nom)	16300 lm
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	371
Chromaticity Coordinate Y (Nom)	380
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	109 lm/W
Color Rendering Index (Nom)	91
LLMF 2000 h Rated	92 %

LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	84 %
LLMF 8000 h Rated	83 %
LLMF 12000 h Rated	80 %
LLMF 16000 h Rated	78 %
LLMF 20000 h Rated	76 %

• Operating and Electrical

Power (Rated) (Nom)	149.0 W
Lamp Current (EM) (Nom)	1.814 A
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	900 s
Ignition Time (Max)	30 s
Voltage (Nom)	97 V

• Controls and Dimming

Dimmable	Yes
Run-Up Time 90% (Max)	4 min

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	12.6 mg

PHILIPS

MASTER CityWhite CDO-TT

Energy Consumption 164 kWh
kWh/1000 h

• UV

Pet (Niosh) (Min) 8 h/500lx
Damage Factor D/fc (Max) 0.6

• Luminaire Design Requirements

Bulb Temperature (Max) 450 °C
Cap-Base Temperature (Max) 250 °C

• Product Data


Full product code 871869659675300
Order product name MASTER CityWhite CDO-TT Plus 150W/942 E40
EAN/UPC - Product 8718696596753
Order code 928082519230
Numerator - Quantity Per Pack 1
Numerator - Packs per outer box 12
Material Nr. (12NC) 928082519230
Net Weight (Piece) 135.000 g
ILCOS Code MT/UB-150/942-H-E40-48/211

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Lamps may use electromagnetic control gear or electronic gear suitable to drive CDO lamps (e.g. HID-PV Xt CDO)
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

- Warm restart time can be up to 15 minutes; T15 ignitors therefore advised
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

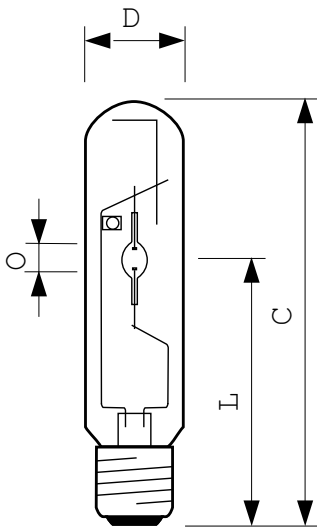


CDO-TT Plus, E40

CDO-TT Plus 150W/942 E40

Product	D	O	L	C
MASTER CityWhite CDO-TT Plus 150W/942 E40	46 mm	10 mm	132 mm	211 mm

Photometric data

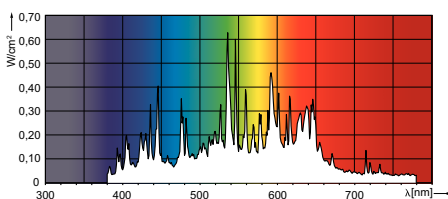



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, September 19
data subject to change