

# MSR Hot Restrike

## MSR 575 HR 1CT

High-efficiency hot restrike metal halide lamps designed for optimum light collection

### Product data

#### • General Characteristics

System Description	Hot Restrike
Cap-Base	G22
Cap-Base Information	-
Execution	-
Burning Position	any
Main Application	Studio/Theatre
Life to 50% failures	1000 hr
EM	

#### • Electrical Characteristics

Rated Lamp Wattage	575 W
Technical Lamp Power	575 W
Lamp Current	6.95 A
Ignition Supply Voltage	207 (min) V
Dimmable	yes

#### • Light Technical Characteristics

Colour Code	-
Colour Rendering Index	90 Ra8
Colour Temperature	6000 K
Colour Temperature Technical	6025 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	328 -
Lamp Luminous Flux	40000 (min), 49000 (nom) Lm
EM	

Lamp Luminous Efficacy EM	85 Lm/W
---------------------------	---------

#### • Product Dimensions

Overall Length C	145 (max) mm
Diameter D	30 (max) mm
Width F	41 (min), 42 (nom), 43 (max) mm
Light Center Length L	69 (min), 70 (nom), 71 (max) mm
Arc Length O	7.0 mm


#### • Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	700 (max) C

#### • Product Data

Order code	190246 45
Full product code	871150019024645
Full product name	MSR 575 HR 1CT
Order product name	MSR 575 HR 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8711500190246
Bar code on outerbox - EAN3	8711500190253
Logistic code(s) - 12NC	928097705108
Net weight per piece	0.100 kg

## Dimensional drawing





### G22

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 575 HR	-	-	-	145	30	-	41	42	43	69	70	71	7.0



## Photometric data

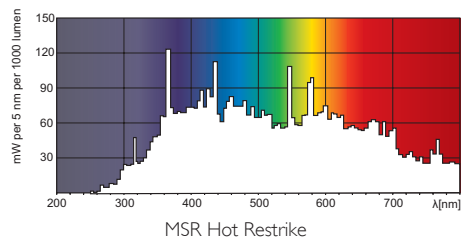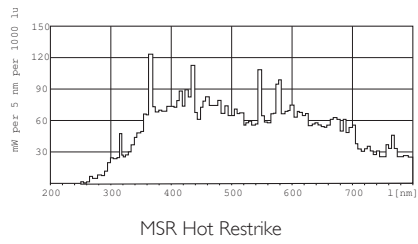

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, May 8  
data subject to change