



TUV PL-L

TUV PL-L 55W/4P HF 1CT

TUV PL-L lamps are compact UVC (germicidal) lamps used in residential water and air disinfection units. The compact size of the lamp allows for a small system design and design flexibility. TUV PL-L lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Thanks to the single-ended lamp base, lamp replacement is easy.

Product data

• General Characteristics

System Description	High Frequency
Cap-Base	2G11
Cap-Base Information	4 Pins
Bulb	2xT16
Execution	-
Main Application	Disinfection
Useful Life	9000 hr

• Electrical Characteristics

Rated Lamp Wattage	55 W
Technical Lamp	55 W
Power	
Lamp Voltage	103 V
Lamp Current	0.54 A

• Light Technical Characteristics

Colour Code	TUV
Colour Designation	-

• UV-related Characteristics

UV-C Radiation	17.0 W
----------------	--------


• Product Dimensions

Base Face to Base	505 (max) mm
Face A	
Insertion Length B	530 (max) mm
Overall Length C	535 (max) mm
Diameter D	38 (max) mm
Diameter D1	18 (max) mm


• Product Data

Order code	633798 40
Full product code	871150063379840
Full product name	TUV PL-L 55W/4P HF 1CT
Order product name	TUV PL-L 55W/4P HF 1CT/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500633798
Bar code on outerbox - EAN3	8711500633804
Logistic code(s) - 12NC	927908704007
Net weight per piece	134.000 gr


Dimensional drawing



Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
TUV PL-L 55W/4P HF	505	530	535	38	18



Photometric data

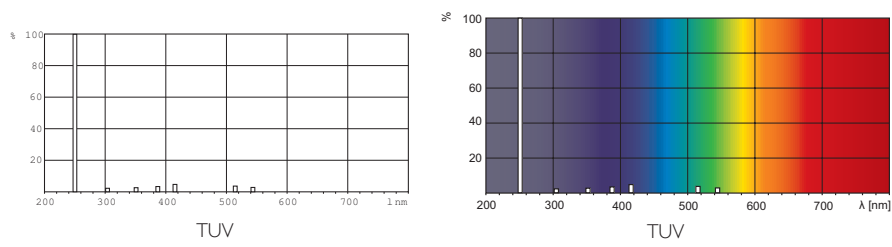

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, May 17
data subject to change