

# Actinic BL TL/TL-D/T5



## Actinic BL TL 11W/10

With an optimized performance to attract most insects, Actinic BL TL, BL TLD and BL T5 lamps are the ideal choice for electronic insect killer systems. They are also suitable for photopolymerization and reprographic processes. A wide choice of wattages and a special 200-degree internal reflector version are available. In addition, Philips provides single-ended compact and T5 Actinic lamp versions as well as a circular Actinic lamp. For extra safety, there is a special shatter-proof "Secura" option which ensures that all the lamp's glass and components are retained in a special outer sleeve in the case of accidental breakage. Hence, product designers have a high degree of flexibility in choosing the best fitting solution for their needs – including compact designs. What's more, as a 100% lead-free and low-mercury product these lamps also provide a responsible environmental choice.

## Product data

### • General Characteristics

Cap-Base	G5
Bulb	T16
Main Application	Reprography
Useful Life	2000 hr

### • Electrical Characteristics

Lamp Wattage	11 W
Lamp Wattage Technical	11.5 W
Lamp Voltage	34 V
Lamp Current	0.400 A

### • Environmental Characteristics

Mercury (Hg) Content	4.4 mg
----------------------	--------

### • Light Technical Characteristics

Color Code	10
Color Designation (text)	Actinic
Chromaticity Coordinate X	230 -
Chromaticity Coordinate Y	230 -
Depreciation 500 hours	30 %
Depreciation 1000 hours	40 %
Depreciation 2000 hours	45 %

### • UV-related Characteristics

UV-A Radiation 100hr (IEC)	2.0 W
UV-B/UV-A (IEC)	0.2 %

### • Product Dimensions

Base Face to Base Face A	212.1 (max) mm
Insertion Length B	216.8 (min), 219.2 (max) mm
Overall Length C	226.3 (max) mm
Diameter D	16 (max) mm


### • Product Data

Order code	928000601030
Full product code	928000601030
Full product name	Actinic BL TL 11W/10
Order product name	Actinic BL TL 11W/10
Pieces per pack	1
Packing configuration	10X25CC
Packs per outerbox	250
Bar code on pack - EAN1	8711500951458
Bar code on intermediate packing - EAN2	8711500951465
Bar code on outerbox - EAN3	8711500951472
Logistic code(s) - 12NC	928000601030
Net weight per piece	21.000 gr


# PHILIPS

sense and simplicity



## Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL 11W/10	212.1	216.8	219.2	226.3	16



Photometric data

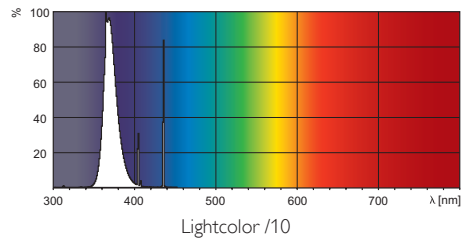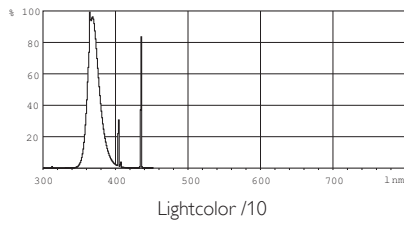

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, August 26  
data subject to change