



MASTERColour CDM-T Evolution

MASTERColour CDM-T Evolution 70W/930 G12

Single-ended, highest-efficiency, longest-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Information

Cap-Base	G12 [G12]
Bulb Shape	T19 [T 19mm]
Operating Position	VBU/VBD60 [Vertical or Base Up/ Base Down +/-60D]
Life To 5% Failures (Nom)	13000 h
Life To 10% Failures (Nom)	15000 h
Life To 20% Failures (Nom)	17000 h
Life To 50% Failures (Nom)	20000 h
ANSI Code HID	-

• Light Technical

Colour Code	930 [CCT of 3000K]
Luminous Flux (Rated) (Nom)	8800 lm
Colour Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	96 %
Lumen Maintenance 12000 h (Nom)	88 %
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 4000 h (Nom)	92 %
Chromaticity Coordinate X (Nom)	0.426
Chromaticity Coordinate Y (Nom)	0.388
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	120 lm/W

Colour Rendering Index horiz (Min)	87
Colour Rendering Index horiz (Nom)	90

• Operating and Electrical

Power (Rated) (Nom)	73.0 W
Lamp Current Run-Up (Max)	2 A
Ignition Peak Voltage (Max)	5000 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	101 V
Voltage (Min)	91 V
Voltage (Nom)	96 V

• Controls and Dimming

Dimmable	No
Run-up Time 90% (Max)	3 min
Run-up Time 90% (Nom)	1.5 min

• Mechanical and Housing

Bulb Finish	Clear (CL)
-------------	------------

• Approval and Application

Energy Efficiency Label	A+
-------------------------	----

PHILIPS

MASTERColour CDM-T Evolution

Mercury (Hg) Content (Nom) 6.6 mg
 Energy Consumption kWh/1000 h 80 kWh

Pinch Temperature (Max) 350 °C

• UV

Pet (Niosh) (Min) 8 h/500lx
 Damage Factor D/fc (Max) 0.3

• Luminaire Design Requirements

Bulb Temperature (Max) 500 °C
 Cap-Base Temperature (Max) 250 °C

• Product Data


Full product code 871829171376000
 Order product name MASTERColour CDM-T Evolution 70W/930 G12
 EAN/UPC - Product 8718291713760
 Order code 71376000
 Numerator - 1
 Quantity Per Pack Numerator - Packs 12 per outer box
 Material Nr. (12NC) 928061705131
 Net Weight (Piece) 28.000 g

Warnings and Safety

- Use only in a totally enclosed luminaire, even during testing (IEC61167, IEC62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- The vast majority of drivers are fully compatible with CDM Evolution lamps. However, best performance is guaranteed with Philips drivers.

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- CDM Evolution lamps are designed to comply with IEC standards
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

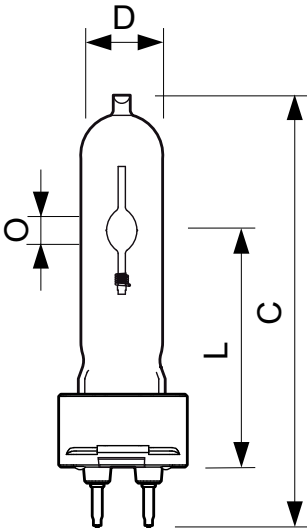


CDM-T Evolution G12


CDM-T Evol 70W/930 G12

Product	D	O	L	L	L	C
MASTERColour CDM-T Evolution 70W/930 G12	20 mm	9 mm	55 mm	57 mm	56 mm	103 mm

Dimensional drawing



Photometric data

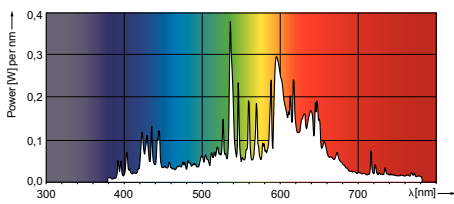

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change