

MASTER LEDspot MV

MAS LEDspotMV VLE D 3.5-35W GU10 827 40D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells.MASTER LEDspot MV delivers huge energy savings and minimizes maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Product data

• General Information

 Cap-Base
 GU10

 Bulb Shape
 PAR16 [PAR 2 inch]

 Nominal Lifetime (Nom)
 35000 h

 Switching Cycle
 50000X

 B50L70
 35000

 Technical Type
 3.5-35W

• Light Technical

827 [CCT of 2700K] Color Code Beam Angle (Nom) 40 305 lm Luminous Flux (Nom) Luminous Flux 305 lm (Rated) (Nom) 550 cd Luminous Intensity (Nom) Warm White (WW) Color Designation Rated Beam Angle Correlated Color 2700 K Temperature (Nom) Color Consistency <6 80 Color Rendering Index (Nom) LLMF At End Of 70 % Nominal Lifetime (Nom) Luminous Flux In 90° 265 lm Cone (Rated)

• Operating and Electrical

Input Frequency 50 to 60 Hz Power (Rated) 3.5 W (Nom) 19 mA Lamp Current (Nom) Wattage Equivalent 35 W Starting Time (Nom) 0.5 s Warm Up Time To 0.5 s 60% Light (Nom) Power Factor (Nom) 0.8 220-240 V Voltage (Nom)

Controls and Dimming

Dimmable Yes

• Approval and Application

Energy Saving Yes
Product
Suitable For Accent Yes
Lighting
Energy Efficiency A++
Label (EEL)
Energy Consumption 4 kWh
kWh/1000 h

• Product Data

Full product code 871869656298700
Order product name MAS LEDspotMV VLE D 3.5-35W
GU10 827 40D
EAN/UPC - Product 8718696562987



MASTER LEDspot MV

Order code 929001215502

Numerator - Quantity Per Pack
Numerator - Packs
Numerator - Packs
per outer box


Material Nr. (12NC) 929001215502 Net Weight (Piece) 0.036 kg

Warnings and Safety

 \bullet Operating temperature range is between -20° C and 45° C ambient

- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Dimensional drawing

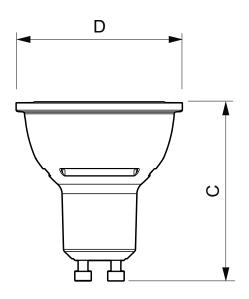


GU10 230V 4W-35W 260lm 40D 2700K GU10 D


Product	D	0
MAS LEDspotMV VLE D 3.5-35W GU10 827 40D	50 mm	56 mm

Photometric data

Accent Lighting - Spots

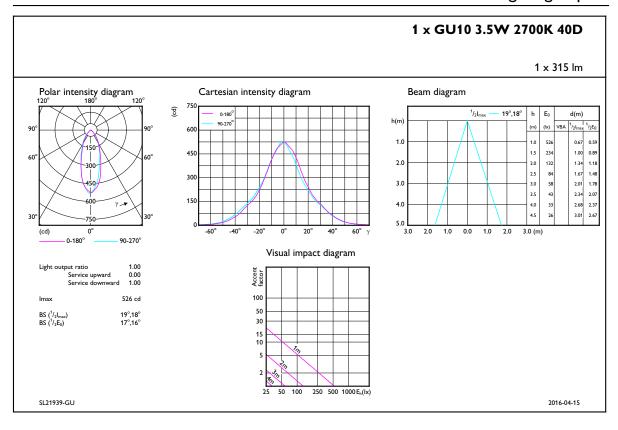

MASTER LEDspot MV

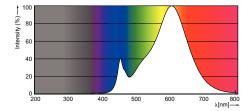



© 2016 Philips Lighting Holding B.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.